



THE HULK

Frozen cabinet Plug & Play Ready to use.




THE NEW PRODUCE.


LARGE CAPACITY, MEETS ALL NEEDS.

The Hulk		HW21B-L-BP	HW21B-L-BP	HW25B-L-BP
Technical Data				
total display area	m ²	2.14	2.14	2.53
Ambient temperature rang	°C	+24 to +28	+24 to +28	+24 to +28
Inner temperature rang	°C	-18 to -23	-18 to -23	-18 to -23
Sound Pressure in 1 m. distance	dB(A)	45.8	45.8	45.8
Electrical Data				
Nominal Voltage	V/Hz	220-240 / 50 Hz	220-240 / 50 Hz	220-240 / 50 Hz
Nominal Power cabinet	W	450	450	450
Nominal Power LED light	W	45	45	67
Fuse protection	A	16	16	16
Length of power supply cord	m.	2	2	2
Refrigeration Data				
Refrigerant type		R290	R290	R290
Dimensions				
Length outside / inside	mm.	2115/1970	2115/1970	2357
Depth outside / inside	mm.	1015/938	1015/938	1015/938
Front access height / height outside	mm.	778.5/910	778.5/910	778.5/910
Stacking height	mm.	550	550	550
Weight				
Net weight (excl. packaging, incl.	Kg.	150	138	173

THE HULK HW21B-L-BP 2115 / 2502 Middle case

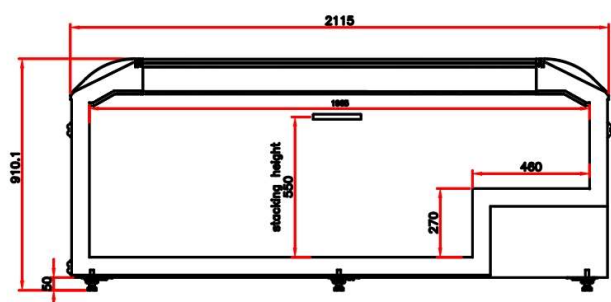

THE HULK HW21B-L-BP 2115 End Case

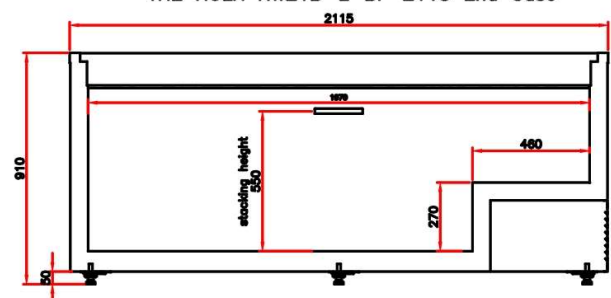

V.S.Refrig System Co.,Ltd.

44/45 Banmai Bangyai
Nonthaburi 11140

Tel : 02-432-6016

Email :Service@Vsrefrig.com

ISO9100